






## Use Cadman DrainX Pervious Concrete Pavement ...

*... For Your Project ... For Our Environment*

- 

**Storm Water Management**  
DrainX helps maximize your land use by serving as a detention vault as well as driving surface.
- 

**Low Impact Development (LID)**  
DrainX naturally recharges the ground water table and conserves water while protecting our streams.
- 

**Architectural**  
DrainX can be stained or colored to enhance it's overall appearance.

### Available in Two Great Mix Designs:



designed with 3/8" gravel



designed with 1/4" gravel

See samples of our two great mix designs at our Cadman Building Materials Store (425) 868-7334


**WHEN IT'S RAINING, IT'S DRAINING**  
**DrainX Pervious Concrete Pavement**



# Project Profiles

## Mukilteo Short Plat

### DrainX P

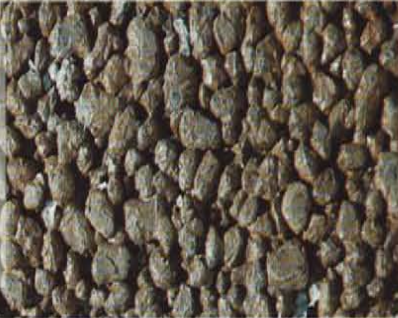

**Scope:** 800 feet of roadway  
**DrainX Utilized:** 250 cubic yards  
**Estimated Savings:** \$1,000,000\*  
**Contractor:** Finishing Edge

*"Cadman's DrainX pervious concrete is consistent in its manageability and quality. We count on Cadman to provide the materials we need, when we need them."*

**Kevin Morrison, Vice President**  
 Finishing Edge Concrete Construction

## Snoqualmie Gourmet Ice Cream

### DrainX G



**Scope:** 25,000 square foot parking lot  
**DrainX Utilized:** 328 cubic yards  
**Estimated Savings:** 25% reduction in project costs  
**Owner:** Barry & Shahnaz Bettinger

*"Using DrainX allowed me to take out the detention vault and detention pond which resulted in significant cost savings"*

**Barry Bettinger, Owner**  
 Snoqualmie Gourmet Ice Cream

### Cadman DrainX

#### P (3/8")

#### G (1/4")

Infiltration Rate (Inches Per Hour)	200+	200+
Void Content (Target)	15-25%	15-25%
Compressive Strength	3000psi	2500psi
Lbs. Per Cubic Foot	107	100
Bulk Density Per Cubic Foot	170	170
Slump	0-1"	0-1"
Material Sub-Grade**	Cadman Clear Crushed	Cadman Clear Crushed
Subgrade Depth***	4-8"	4-8"
Freeze Thaw Resistant	YES	YES

\* Savings estimates based on value of land that retention vault would have used and vault itself.

\*\* Subgrade should consist of free draining material without fines. Prepare subgrade with minimum 6" of Cadman clear crushed or washed gravel.

\*\*\* Depth of subgrade material depends on conditions of site. Please consult your engineer to determine depth.

**CADMAN**  
 HEIDELBERGCEMENT Group®

Call your sales representative at (888) 322-OTIS

www.cadman.com